


Data Sheet

Solid Parquet Block

EU

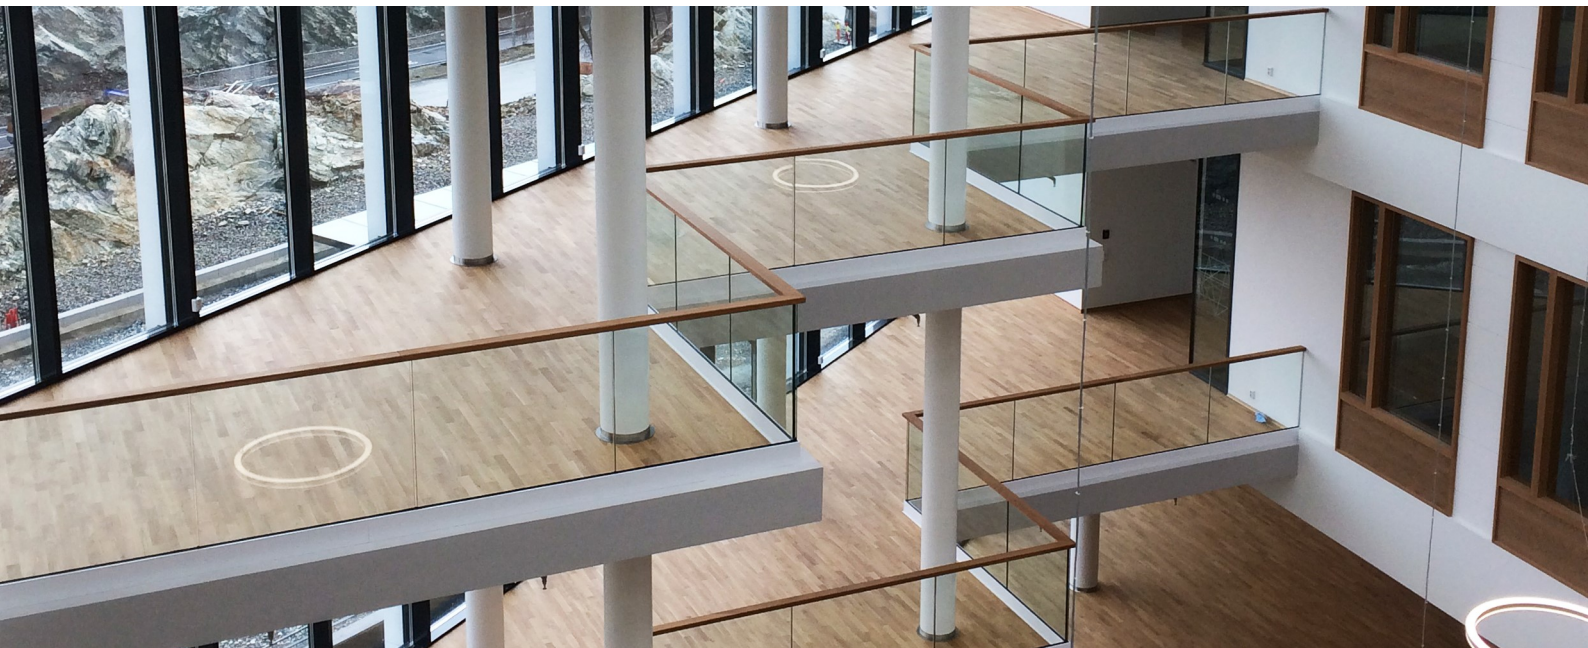

High quality and uniformity with safe hand.

Short blocks and pattern blocks in high quality and good gradings. Handled with the same dedication that characterizes Hørning Parket in all respects.

Special dimensions and wood species can be supplied on request

Solid Parquet Block (EU) - Data Sheet

Short blocks

To be installed in sequence on a firm base.

Pattern blocks

To be installed in a pattern on a firm base.

Dimensions

Thickness: 16 / 22 mm

Width: 70 mm

Length: 350 / 500 mm.

Surface

Untreated or oiled with clear natural oil.

Wood species

Oak and ash.

Grading guidelines

Exquisit and Living.

Profile

Available with tongue/groove and sharp edges.

Strips for patterns are available as both left and right strips in equal numbers.

Special measurements and productions are available on request.

Grades

Grades vary from wood specie and dimension.

Wood is a natural material, thus there will always be variations compared to descriptions and photos. Samples will only show dimension and construction and not the grade. It is certain that variations will exist between small samples and the actual deliveries.

Select/Exquisit

General uniform colour and wood structure. Variations due to growth conditions will exist. In principle free of knots and sapwood. Whirls, small scratches, cross grains and brown heart may be found to a small extent.

Nature/Living

A more characteristic look with natural colours and wood structure. In principle free of open knots, cracks, pith etc. Whirls, healthy knots, small scratches, cross grains and silicon stains may be found. Sapwood or brownheart will be found depending of the wood specie.

Rustic/Country

A very characteristic look with all natural colour variations and structures. Knots, sapwood and brownheart is found. Very small open knots and scratches may be found.

Production tolerances

Our products comply with – as a minimum - the standard tolerances listed in EN 13226.

Thickness: +/- 0.2 mm

Width: +/- 0.2 mm

Length: +/- 0.5 mm

Moisture content in the wood: 9% (+/- 2%)

Under-floor heating

Under-floor heating may be used. Please see the installation guide.

Indoor climate

It is important that the surface temperature never exceeds 27 degrees!

The relative humidity in the air (R.H.) must always be between 35-65% before, during and after installation.

Always study the installation guide from HØRNING prior to installation.

Environment

FSC® certified wood is delivered on request.

HØRNING cares about the environment and sustainable forestry.

Naturally HØRNING is FSC-certified.

CE-certification

HØRNING floors are generally CE certified in accordance with the EC declaration regarding wooden floors for indoor usage EN 14342.

