


Data Sheet

Solid Planks

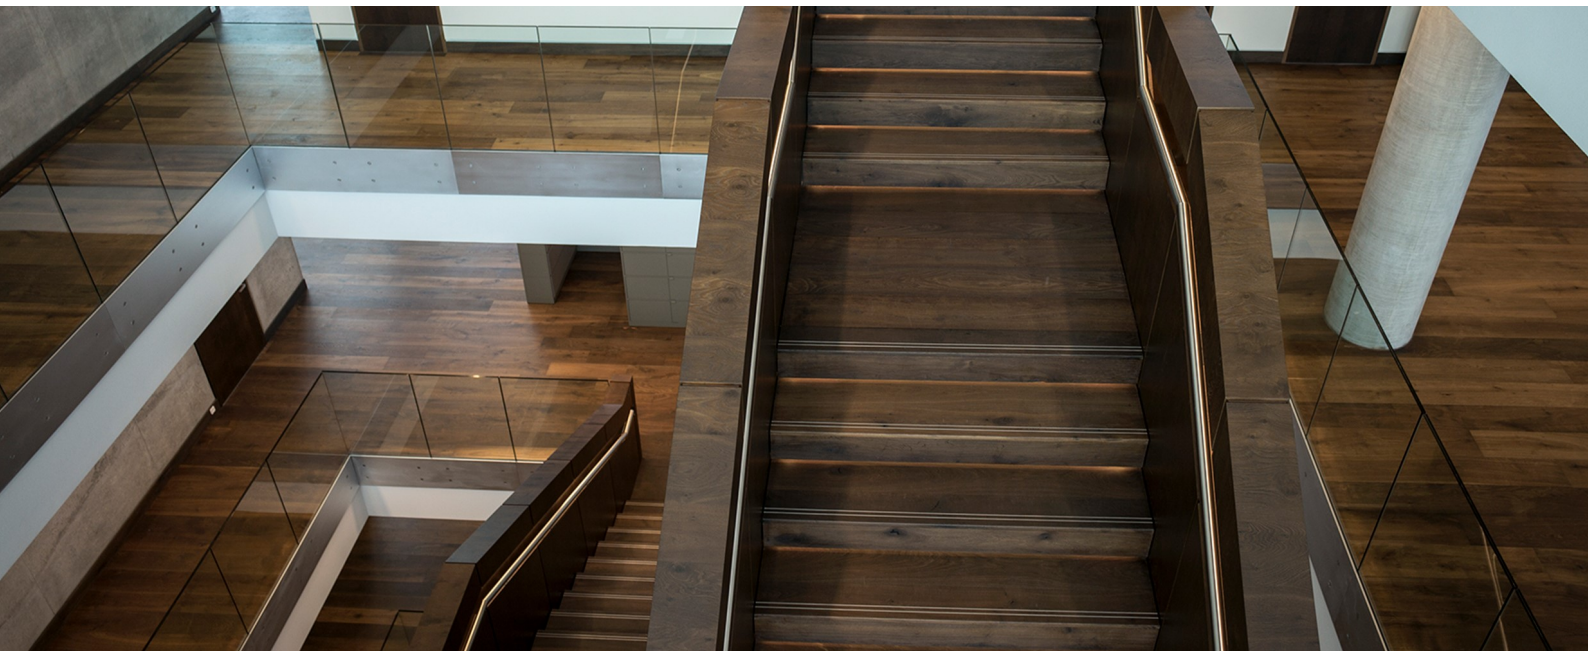

Superb quality in long lanes.

A practically infinite number of combinations of widths and lengths, light and dark woods, the possibility of rubber inserts and in contrasting borders along the walls, etc.

Plank flooring from HØRNING gives you free space to create exactly the expression that compliments the room best.

HØRNING planks for example come with an ultra-fine lacquer finish that gives you the appearance of the oil and the lacquer's strength. Finished planks are available on request.

Solid Planks - Data Sheet

Dimensions

Thickness: 16 / 20 mm
 Width: 100 / 120 / 130 / 150 / 180 mm
 Length: 600-2700 / 800-2500 mm

Additional dimensions are available upon request.

Wood species

Ash, bilinga, oak, jatoba, merbau, smoked oak, teak, walnut, wenge. Other wood species are available upon request.

Profile

Tongue/groove on 4 sides.
 Delivered with sharp edges as standard. May be delivered with micro bevel upon request or groove for jointing on the long side.

Surface

Delivered filled, sanded and unfinished as standard. May be delivered with finished surface treatment with hard wax oil, oil or mat lacquer upon request.

Grades

Grades vary from wood specie and dimension.

HØRNING's many different plank floors are made of fresh wood modified to the dimensions of the plank floors. In general wide/long dimensions will show most variations, knots, fillings etc.

Wood is a natural material and variations compared to descriptions and photos will always exist. Samples will only show dimensions and construction, and cannot show the grade. It is certain that variations will be found between small samples and the actual deliveries.

Select/Exquisit

General uniform colour and wood structure. Variations due to growth conditions will always exist. Healthy knots and a few fillings of knots and minor cracks may be found. Whirls, small scratches and cross grains, sapwood and brownheart may be found to a small extent. Also this grade involves, that the wider and longer the planks are, the more and bigger variations, knots etc. will be found.

Nature/Living

A more characteristic look with natural colours and wood structure. In principle free of open knots, cracks, pith etc. Whirls, healthy knots, small scratches, cross grains and silicon stains will be found depending of the wood specie. Knots occur naturally in both small and big dimensions. Open knots, cracks etc. are filled. Sapwood, brownheart and pith will be found depending of the wood specie.

Rustic/Country

Very characteristic look with all natural colour variations and wood structures. Knots of all types, sapwood, brownheart, filled knots and cracks will be found. Open knots, cracks and fillings may be found.

Moisture content in the wood

Kiln dried to 8% (+/- 2%).

Under-floor heating

Under-floor heating may be used – see the installation guide.

Indoor climate

It is important that the surface temperature never exceeds 27 degrees!

The relative humidity in the air (R.H.) must always be between 35-65% before, during and after installation.

Always study the installation guide from HØRNING prior to installation.

Environment

FSC® certified wood is delivered on request.

HØRNING cares about the environment and sustainable forestry.

Naturally HØRNING is FSC-certified.



CE-certification

HØRNING floors are generally CE certified in accordance with the EC declaration regarding wooden floors for indoor usage EN 14342.