

# Data Sheet

# Strips



## **Slightly slimmer than other solid flooring solutions**

HØRNING Strips are solid strips, which are slimmer and thinner than our classic solid parquet strips.

As opposed to our parquet strips, HØRNING Strips can be supplied without tongue and groove, as individual strips or in patterns on net, such as English pattern, Square pattern or Parallel pattern.

## Strips - Data Sheet




English pattern  
Oak




Parallel pattern  
Oak




Square pattern  
Oak

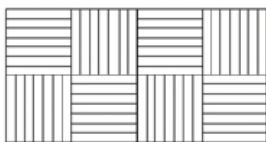


Square pattern

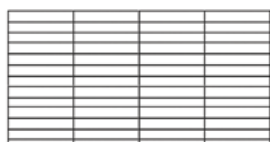

Parallel pattern

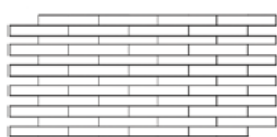


English pattern

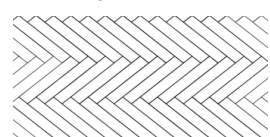

Herringbone pattern

### Without tongue and groove

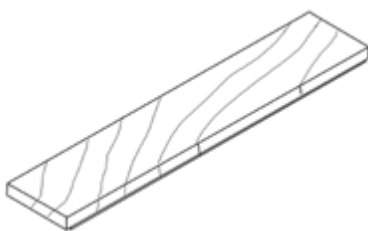

### Dimensions

10x50x250 mm (thickness x width x length).

### Wood species

Ash and oak. Other wood species are available upon request.

### Surface

Untreated.

### Installation

Must be fully glued to the underlying sub-floor by using, for instance, 'HØRNING MS Flexlim' and after installation it must be sanded and filled before treating it with oil or hard wax oil. *Please consult the installation guide for further details.*

### Grading

Strips come untreated and as standard in the Exquisite, Living and Country gradings.

Wood is a wonderful natural material, so variation vis-à-vis descriptions and photos will always occur. Any samples show only dimension and texture and cannot show the grading. Variations will certainly occur between small samples and actual deliveries.

### Exquisit

A consistently very uniform interplay of colour and the wood's texture. Growth-related variations occur. In principal free of knots and chips. A minimum of whirls, small scratches and cross grain, chips and brown core may occur.

### Living

Vibrant appearance with natural interplay of colours and texture. In principal, free of open knots, cracks, pith etc. Whirls, healthy knots, small scratches, cross grains and silicon stains occur. Chips or brown core occur, depending on the type of wood.

### Under-floor heating

Under-floor heating may be used – see the installation guide.

### Indoor climate

It is important that the surface temperature never exceeds 27 degrees!

The relative humidity in the air (R.H.) must always be between 35-65% before, during and after installation.

**Always study the installation guide from HØRNING prior to installation.**

### Environment

FSC® certified wood is delivered on request.

HØRNING cares about the environment and sustainable forestry.

Naturally HØRNING is FSC-certified.

### CE-certification

HØRNING floors are generally CE certified in accordance with the EC declaration regarding wooden floors for indoor usage EN 14342.

